


Assign a specific pager to each of the six buttons on the console, ensuring you're communicating with the correct person, at the right time.

This allows your waiters to devote more time to your guests by eliminating wasted trips to and from the kitchen, and ensuring food is served at the correct temperature, reducing cold food complaints and wastage.

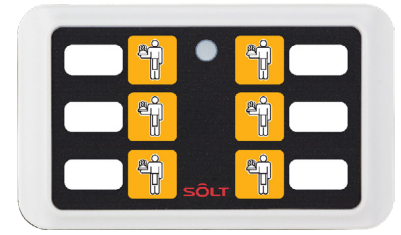

Specifications

General

| | |
|---------------------|----------------------------|
| Frequency | 434.6500 MHz |
| Frequency Stability | +/- 10 ppm |
| Data Rate | 1800 bps |
| Channel Space | 12.5 KHz |
| Modulation | FSK (+/- 3KHz) |
| Antenna | PCB type |
| Output Power(Max.) | 10 mW |
| Power Supply | Coin Battery CR2450 X 2 |
| Indicator(audio) | No sound |
| Indicator(video) | 1 LED (call indicator) |
| Size(mm) | 100 X 60 X 16.5 |
| Weight(g) | 50 |
| Installation Method | Both-sided Tape |

Features

Multi-button available (till 6)

Function selectable: Call only or Call & Cancel

Maximized battery life time

Call Systems Technology Ltd

Unit 240, Centennial Park, Elstree, Hertfordshire, WD6 3SJ
Registered address: 50 Seymour Street, London W1H 7JG
Registered in England No. 4025235 • VAT Reg. No. GB 220 8954 10

Stay connected:

